SONCOZ SGD1 DAC OTA SGD1 SYSTEM UPGRADE

The system is updated online. For the latest version (refer to the official website announcement),

please ignore this upgrade instruction

2022-05-12


SGD1 supports two upgrade methods

1. Mobile hotspot OTA upgrade method

Open the mobile hotspot and set the hotspot name :ANIG, hotspot password : 12345678
 Re-power on SGD1 (turn on WiFi), when the above hotspot is detected, it will automatically detect whether there is new software

➢ If there is, it will automatically upgrade and restart; if not, WiFi will be turned off after one minute, the upgrade function will be turned off, and normal operation

The process is as follows:

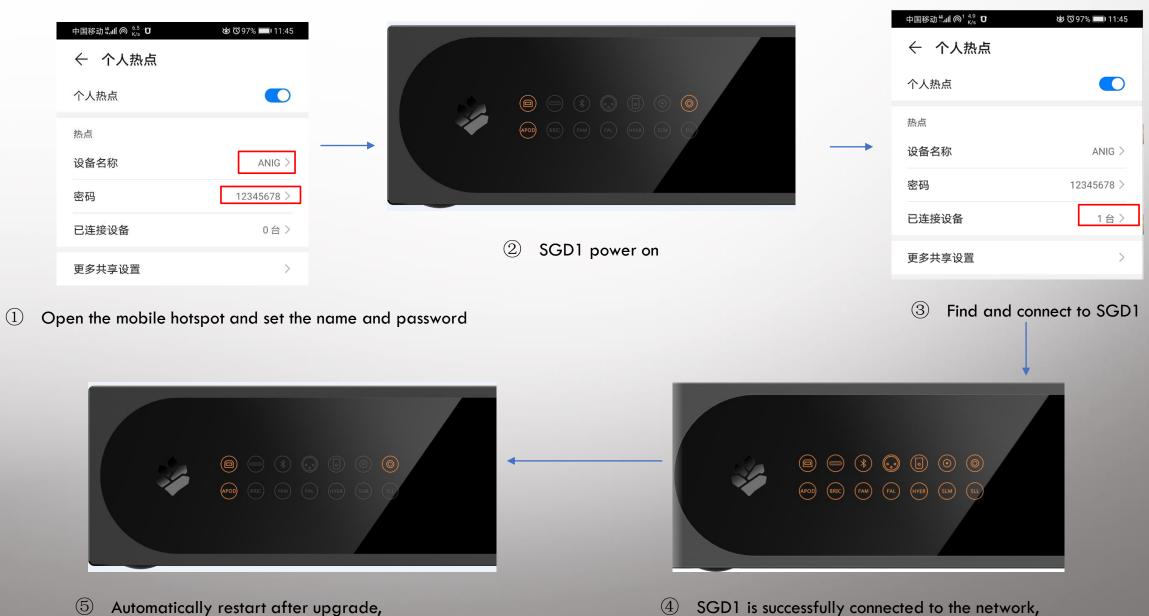

and then restore to the default power-on state

The Power of Original Sound


and the upgrade is started. The icon is all bright when upgrading

- 2. Mobile APP OTA upgrade method (Android mobile APP as an example)
 - >Under SGD1 running status, double press the knob three times and SGD1 will go into configuration network mode, at the same time all the LED indicators will turn on
 - ➢Use the APP (Esptouch) to configure SGD1 with 2.4G WiFi network (Make sure that SGD1 and the phone are on the same 2.4G WiFi network)
 - >After configuring the network connection successfully, it will automatically detect whether there is new software
 - >If there is, it will automatically upgrade and restart; if not, WiFi will be turned off after one minute, the upgrade function will be turned off, and normal operation
 - The process is as follows:

 Download upgrade tool : (Official website downloaded is Android version ,Other versions can be downloaded from Apple store or Google play)



② SGD1 is powered on, double-click the button three times in a row, SGD1 enters the network configuration mode, at this time all the LED indicators on the front panel light up

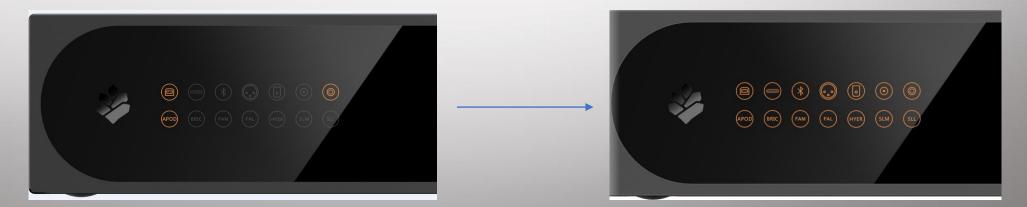

Power on mode

Network configuration mode

3 Install the "Esptouch" APP on your mobile phone, and open it for the following operations

Esptouch	Esp ^t ouch (j)	Esptouch ()
SSID, SONCOZ RSSID, 08,31,86,e8,5d,64 Password, 2:4G WIFI password	SSID; SONCOZ BSSID; 08:31:86:ef:5d:64 Password; soncoz9038	SSID; SONCOZ BSSID: 08:31:86:08:5d:64 Password: soncoz9038
Device count: 1 The Roadcast Multicast	Device count: <u>1</u> Strondcast O Multicast	Device count: <u>1</u> Broadcast Multicast
Make sure your phone and SGD1 are connected to the same 2.4g WiFi network	<text><text><text><section-header></section-header></text></text></text>	Esptouch 完成 ESS3D = 884157320334, InetAddress = 192,168,101,59 CM Completed ! ! ! SEDI will upgrade and restart
CONFIR.H.	CONFIRM	CONFIRM

Note:

- 1. Every time after power off and restart, SGD1 will connect to the previously configured WiFi network. If the network exists, it will automatically detect whether there is new software and update, and then turn off the WiFi function; if the network does not exist, it will turn off the WiFi function after one minute of booting
- 2. Press the knob for more than 6 seconds will reset the system

