



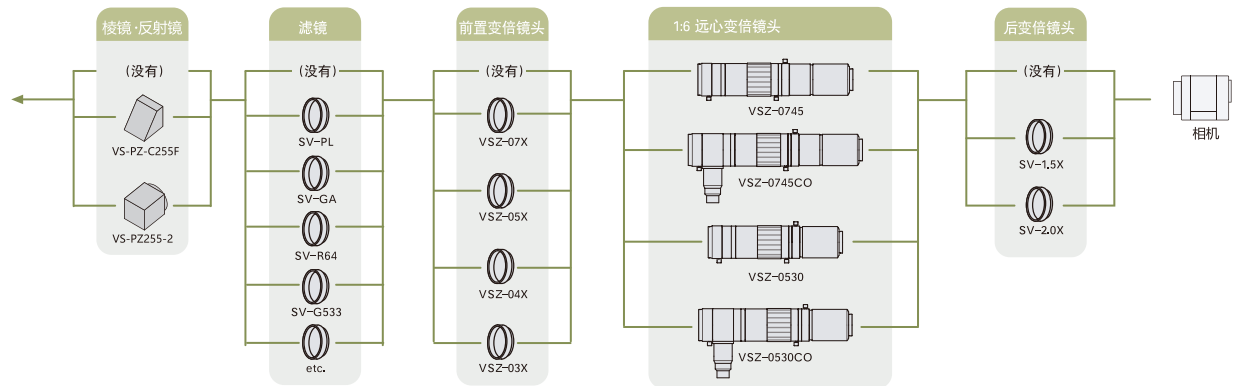


### 接口相关图

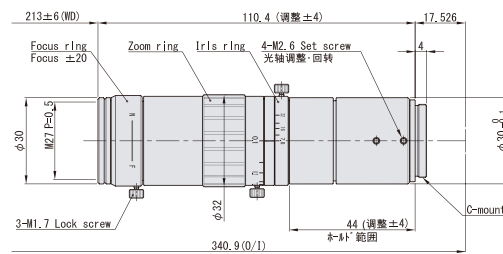

### 1:8 低倍变倍镜头

**VSZ-M0108S**


| 规格               |  | VSZ-M0108S     |               |              |
|------------------|--|----------------|---------------|--------------|
| 可变倍率范围           |  | 0.1x ~ 0.8x    |               |              |
| 光学倍率             |  | 0.1x           | 0.4x          | 0.8x         |
| 视野<br>( VxH )    |  | —              |               |              |
| 2/3"             |  | 48.0 x 64.0 mm | 12.0 x16.0 mm | 6.0 x 8.0 mm |
| 1/2"             |  | 36.0 x 48.0 mm | 9.0 x 12.0 mm | 4.5 x 6.0 mm |
| 1/3"             |  |                |               |              |
| WD               |  | 213.0 mm ±6    |               |              |
| 物像间距离O/I         |  | 340.9 mm       |               |              |
| 实效F *光圈全开        |  | 7.8            | 7.8           | 8.8          |
| NA               |  | 0.006          | 0.026         | 0.045        |
| 景深 允许误差(±0.04mm) |  | 62.4 mm        | 3.9 mm        | 1.1 mm       |
| TV失真             |  | -0.16 %        | 0.03 %        | 0.05 %       |
| 适合芯片             |  | 1/2"           |               |              |
| 滤镜口径             |  | M 27 P = 0.5   |               |              |
| 重量               |  | 134 g          |               |              |

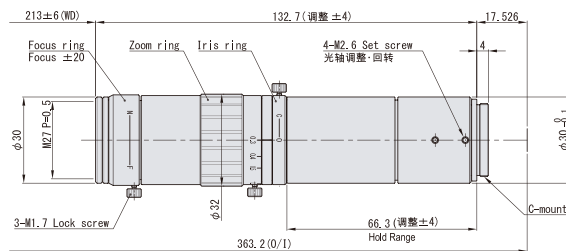**VSZ-M0324S**


| 规格              |  | VSZ-M0324S     |              |              |
|-----------------|--|----------------|--------------|--------------|
| 可变倍率范围          |  | 0.3x ~ 2.4x    |              |              |
| 光学倍率            |  | 0.3x           | 1.2x         | 2.4x         |
| 视野<br>(VxH)     |  | —              |              |              |
| 2/3"            |  | 16.0 x 21.3 mm | 4.0 x 5.3 mm | 2.0 x 2.7 mm |
| 1/2"            |  | 12.0 x 16.0 mm | 3.0 x 4.0 mm | 1.5 x 2.0 mm |
| 1/3"            |  |                |              |              |
| WD              |  | 213.0 mm ±6    |              |              |
| 物像间距离O/I        |  | 363.2 mm       |              |              |
| 实效F *光圈全开       |  | 23.2           | 24.5         | 26.0         |
| NA              |  | 0.006          | 0.024        | 0.046        |
| 景深 允许错乱点φ0.04mm |  | 20.6 mm        | 1.4 mm       | 0.4 mm       |
| TV失真            |  | 0.02 %         | 0.05 %       | 0.04 %       |
| 适合芯片            |  | 1/2"           |              |              |
| 滤镜口径            |  | M 27 P = 0.5   |              |              |
| 重量              |  | 165 g          |              |              |

## 1:10 变倍镜头

# VSZ-10100

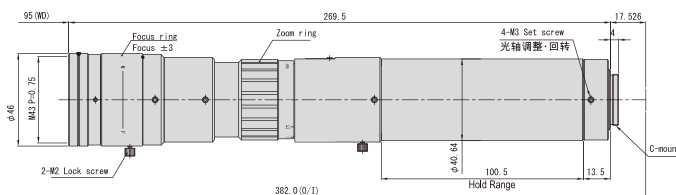

| 规格              |      | VSZ-10100     |              |              |
|-----------------|------|---------------|--------------|--------------|
| 可变倍率范围          |      | 1.0x ~ 10.0x  |              |              |
| 光学倍率            |      | 1.0x          | 4.0x         | 10.0x        |
| 视野<br>( VxH )   | 2/3" | 7.1 x 8.4 mm  | 1.8 x 2.1 mm | 0.7 x 0.8 mm |
|                 | 1/2" | 4.8 x 6.4 mm  | 1.2 x 1.6 mm | 0.5 x 0.6 mm |
|                 | 1/3" | 3.6 x 4.8 mm  | 0.9 x 1.2 mm | 0.4 x 0.5 mm |
| WD              |      | 95.0 mm       |              |              |
| 物像间距离O/I        |      | 382.0 mm      |              |              |
| 实效F *光圈全开       |      | 13.3          | 15.4         | 36.7         |
| NA              |      | 0.038         | 0.130        | 0.136        |
| 景深 允许许乱距@Q.04mm |      | 1.1 mm        | 0.08 mm      | 0.03 mm      |
| TV失真            |      | 0.16 %        | -0.01 %      | 0.02 %       |
| 适合芯片            |      | 2/3"          |              |              |
| 滤镜口径            |      | M 43 P = 0.75 |              |              |
| 重量              |      | 820 g         |              |              |

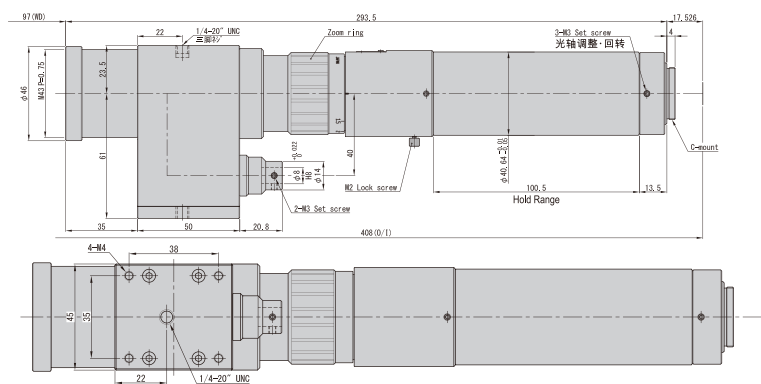**VSZ-10100COL**

| 规格              |      | VSZ-10100COL  |              |              |
|-----------------|------|---------------|--------------|--------------|
| 可变倍率范围          |      | 1.0x ~ 10.0x  |              |              |
| 光学倍率            |      | 1.0x          | 4.0x         | 10.0x        |
| 视野<br>( VxH )   | 2/3" | 7.1 x 8.4 mm  | 1.8 x 2.1 mm | 0.7 x 0.8 mm |
|                 | 1/2" | 4.8 x 6.4 mm  | 1.2 x 1.6 mm | 0.5 x 0.6 mm |
|                 | 1/3" | 3.6 x 4.8 mm  | 0.9 x 1.2 mm | 0.4 x 0.5 mm |
| WD              |      | 97.0 mm       |              |              |
| 物像间距离O/I        |      | 408.0 mm      |              |              |
| 全开F*光圈全开        |      | 13.3          | 15.4         | 36.7         |
| NA              |      | 0.038         | 0.130        | 0.136        |
| 景深 允许斜乱曲φ0.04mm |      | 1.1 mm        | 0.08 mm      | 0.03 mm      |
| TV失真            |      | 0.16 %        | -0.01 %      | 0.02 %       |
| 适合芯片            |      | 2/3"          |              |              |
| 滤镜口径            |      | M 43 P = 0.75 |              |              |
| 重量              |      | 1210 g        |              |              |

### VSZ 倍率 WD相关图

[illegible]