


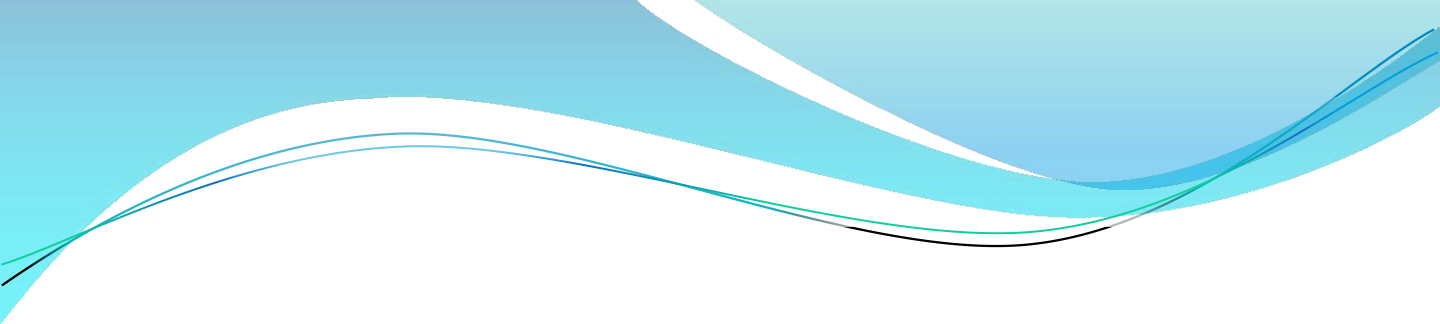

深圳市博音电声科技有限公司

Shenzhen bo sound electroacoustic technology co., LTD

MIC目录

MIC directory




BY4013贴片咪
 $\Phi 4.0 \times 1.3$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB



BY4015BOB-CR
 K
 $\Phi 4.0 \times 1.5$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB




BY4015BOB-C2
 $\Phi 4.0 \times 1.5$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 SNR: 60dBA



BY4015BOGB-C2
 $\Phi 4.0 \times 1.5$ (mm)
 Sensitivity:-32 $\pm$ 3dB
 SNR: 65dBA



BY4015BOP2.8-CRK
 $\Phi 4.0 \times 1.5$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 SNR: 60dBA



BY6022FOB-CRK
 $\Phi 6.0 \times 2.2$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A



BY6027FOB-CR
 K
 $\Phi 6.0 \times 2.7$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB



BY6050FOB-CRK
 $\Phi 6.0 \times 5.0$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A



BY6027BOGB-C
 R
 $\Phi 6.0 \times 2.7$ (mm)
 Sensitivity:-32 $\pm$ 3dB
 B
 SNR: 70dB
 A



BY6027FOB-CR
 $\Phi 6.0 \times 2.7$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A



BY6022FOB-K
 $\Phi 6.0 \times 2.2$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A
 (High antistatic)



BY6027FOP2.8-CRK
 $\Phi 6.0 \times 2.7$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A




BY6050FOP2.8-CRK
 $\Phi 6.0 \times 5.0$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A




BY9767FOB-CR
 $\Phi 9.7 \times 6.7$ (mm)
 Sensitivity:-42 $\pm$ 3dB
 B
 SNR: 60dB
 A




BY9750BUB-C2
 $\Phi 9.7 \times 5.0$ (mm)
 Sensitivity:-45 $\pm$ 3dB
 B
 SNR: 65dB
 A




SM0603-10
3.76*2.95*1.1(mm)
Sensitivity: $-42\pm 3\text{dB/V}$
SNR: 59 dBA



SMZ0603-06
3.76*2.95*1.1(mm)
Sensitivity: $-38\pm 1\text{dB/V}$
SNR: 64 dBA



SM0604-01
3.76*2.24*1.1(mm)
Sensitivity: $-42\pm 3\text{dB/V}$
SNR: 59dBA





SMZ1005-03
3.35*2.5*0.9(mm)
Sensitivity: $-38\pm 1\text{ dB/V}$
SNR: 64 dBA



SMD4310-04
4*3*1(mm)
Sensitivity: -26 dBFS
SNR: 59 dB

BY4013贴片
咪



Type	Omni-directional
Dimensions	Φ4.0mm x 1.3mm
SNR	Typical 60dBA
THD	<1% (94dBSPL@200Hz-7kHz)
Sensitivity	-42 ± 3dBV/Pa
Operating voltage	1.5-8.0VDC
AOP	110dB
Output impedance	<2.2kΩ
Current Consumption	<500μA

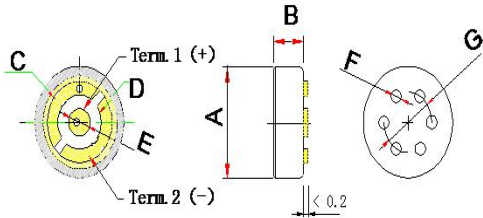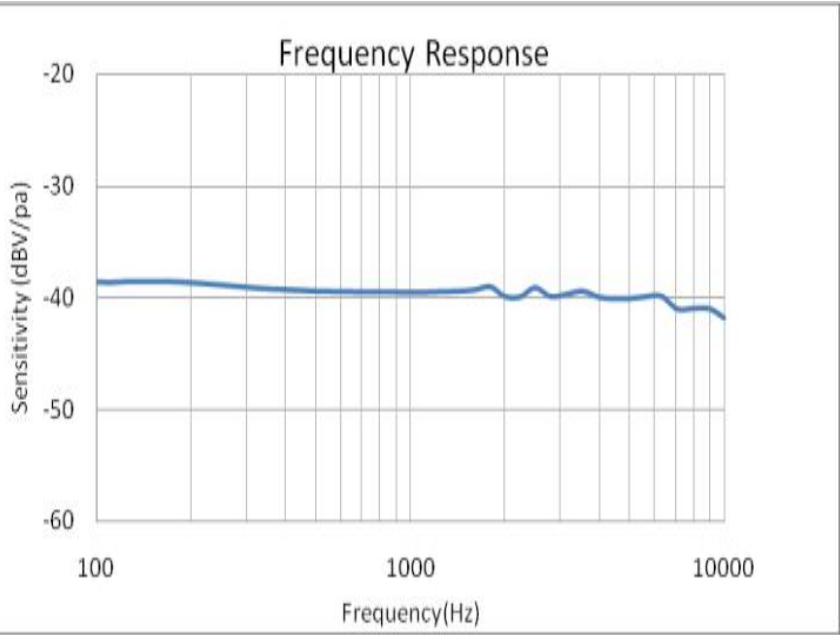

BY4015BOB-CRK	Type	Omni-directional
	Dimensions	Φ4.0mm x 1.5mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

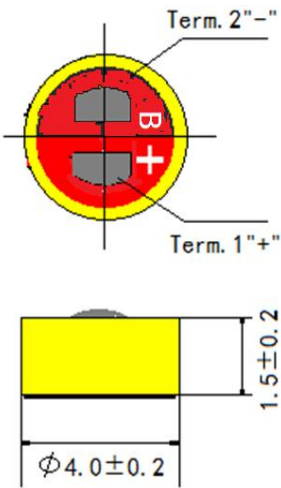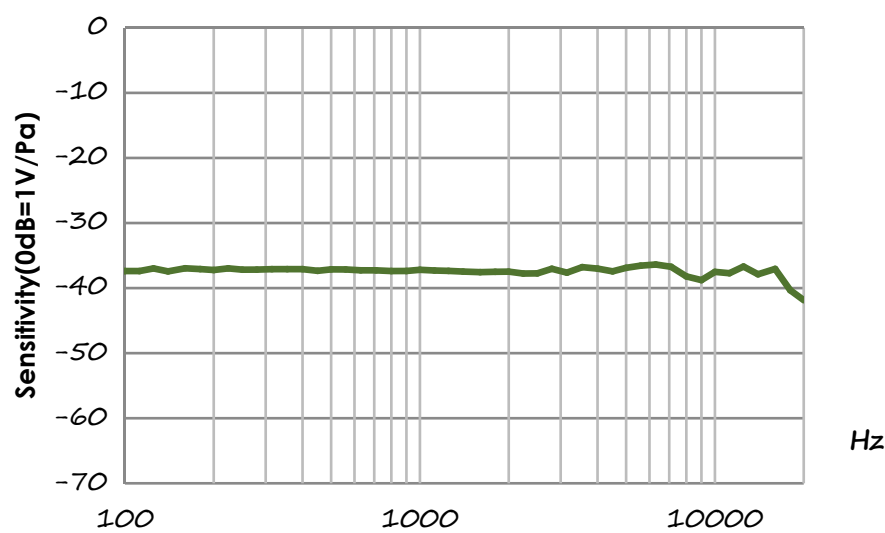

BY4015BOB-C2	Type	Omni-directional
	Dimensions	Φ4.0mm x 1.5mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-10VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

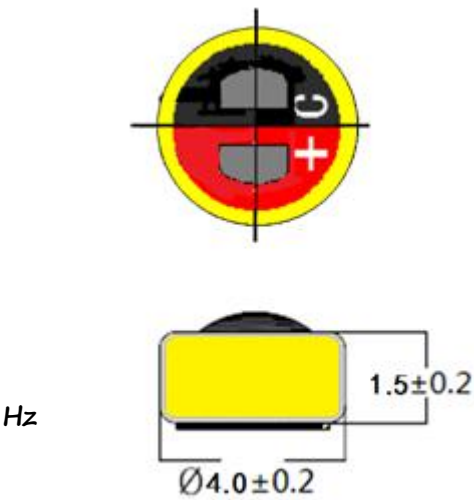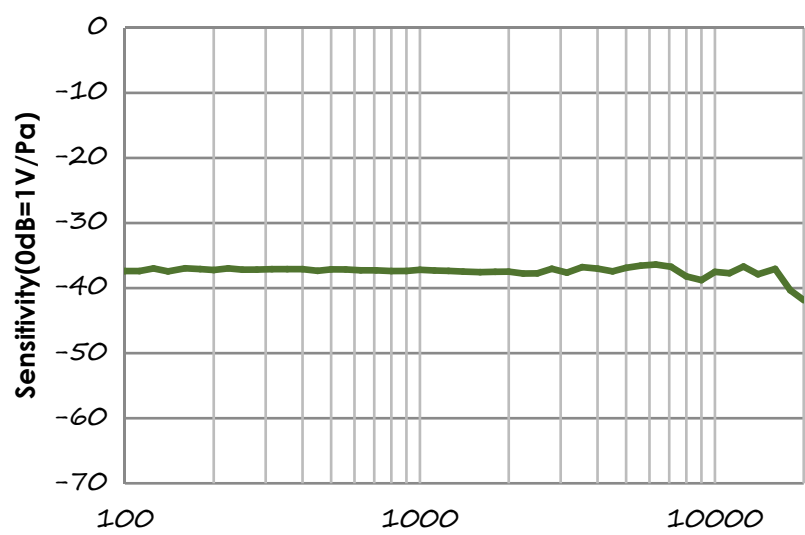


BY4015BOGB-C2	Type	Omni-directional
	Dimensions	Φ4.0mm x 1.5mm
	SNR	Typical 65dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-32 ±3dBV/Pa
	Operating voltage	1.2-10VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

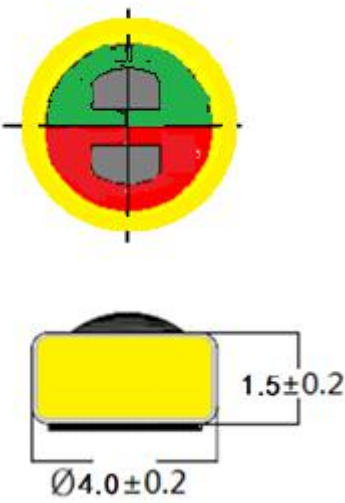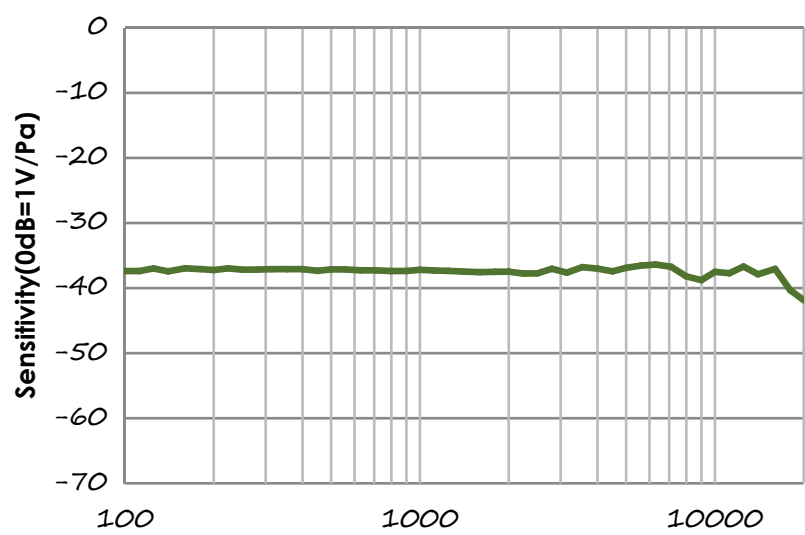

BY4015BOP2.8-CRK	Type	Omni-directional
	Dimensions	Φ4.0mm x 1.5mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

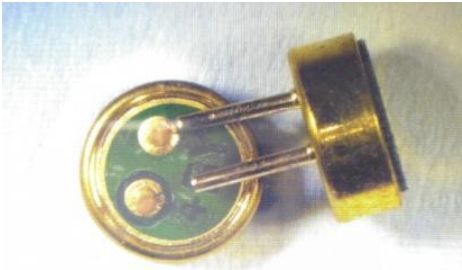



Frequency Response Curve

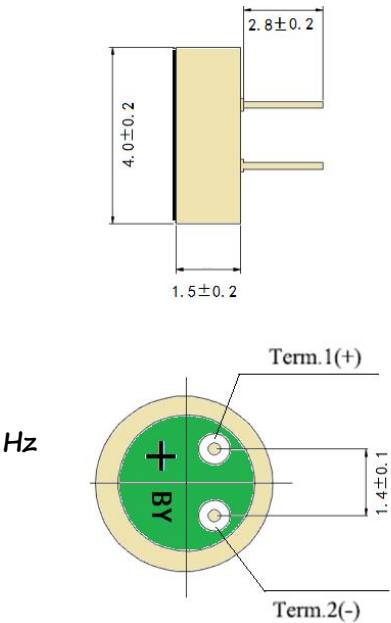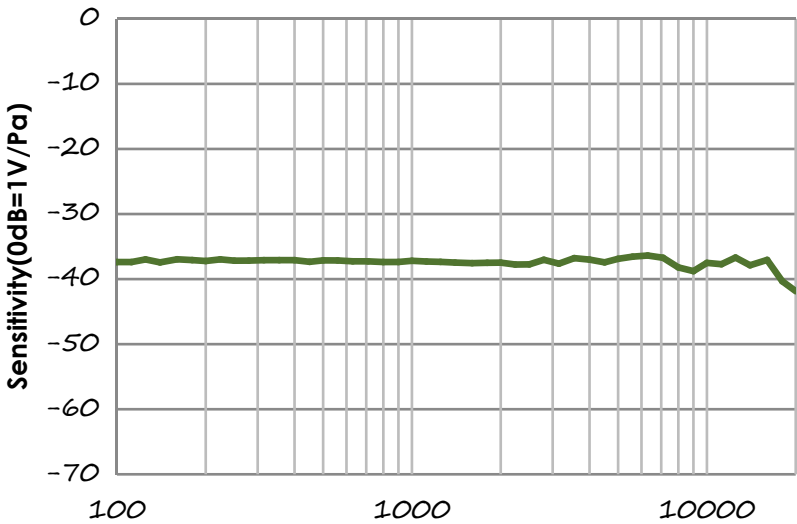

BY6022FOB-CRK	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.2mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

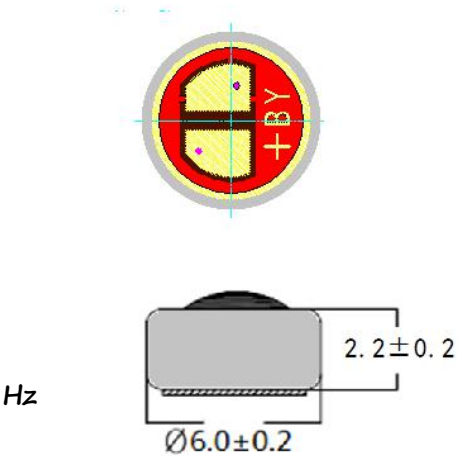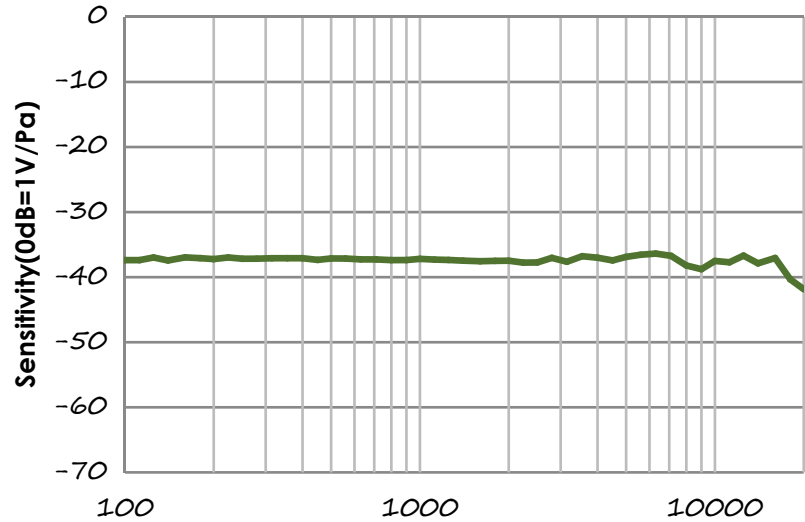

BY6027FOB-CRK	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.7mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

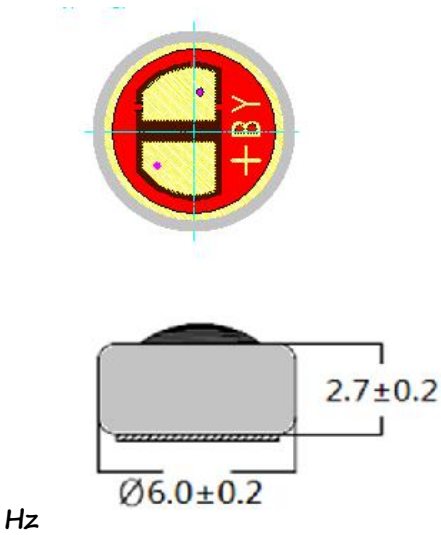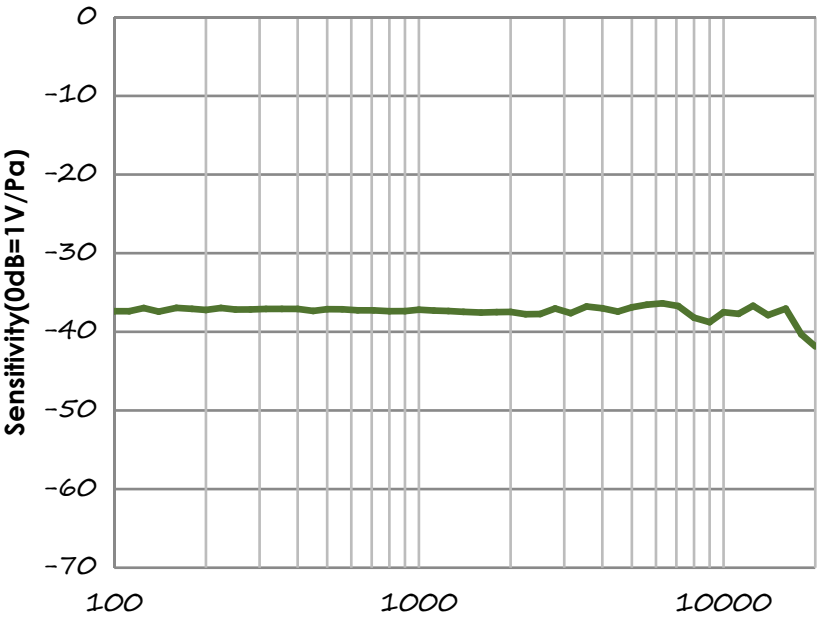




BY6050FOB-CRK	Type	Omni-directional
	Dimensions	Φ6.0mm x 5.0mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA



Frequency Response Curve

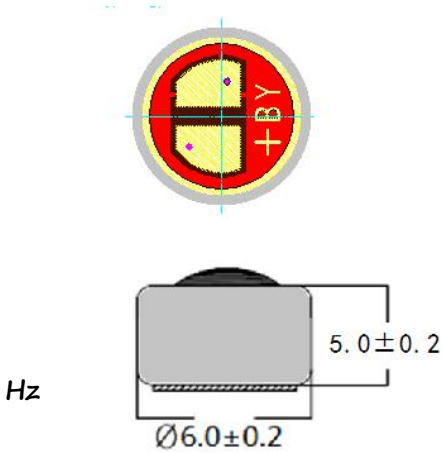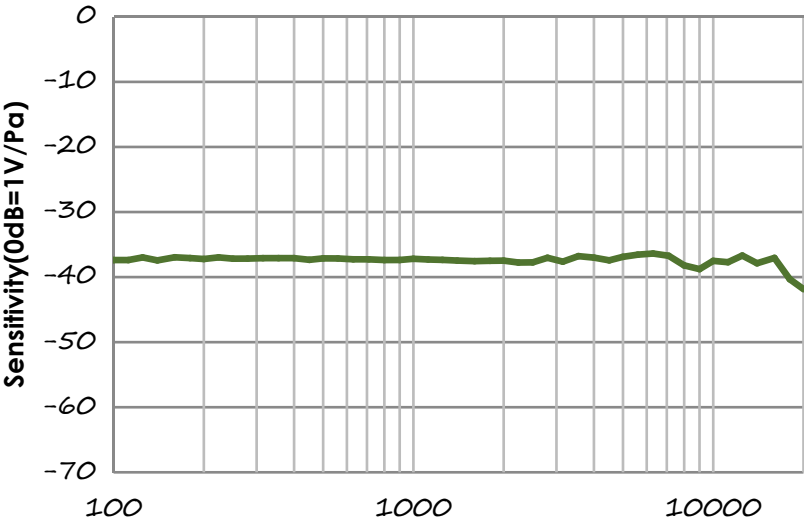



BY6027BOGB-CR	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.7mm
	SNR	Typical 70dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-32 ±3dBV/Pa
	Operating voltage	1.2-10.0VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

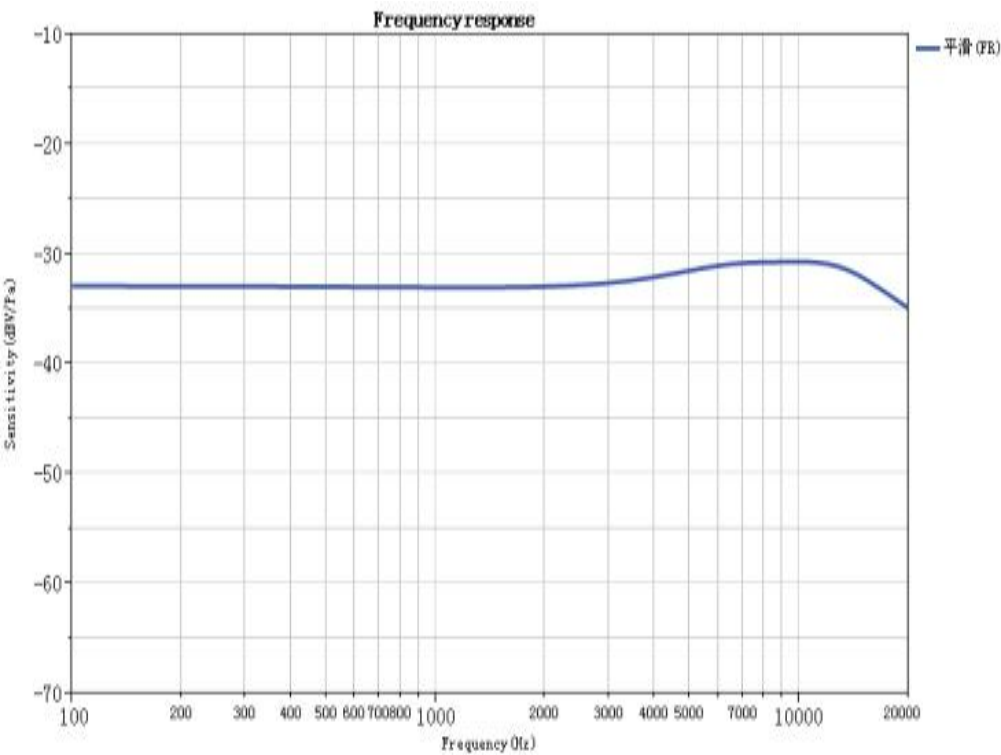


BY6027FOB-CR	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.7mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-10.0VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA



Frequency Response Curve

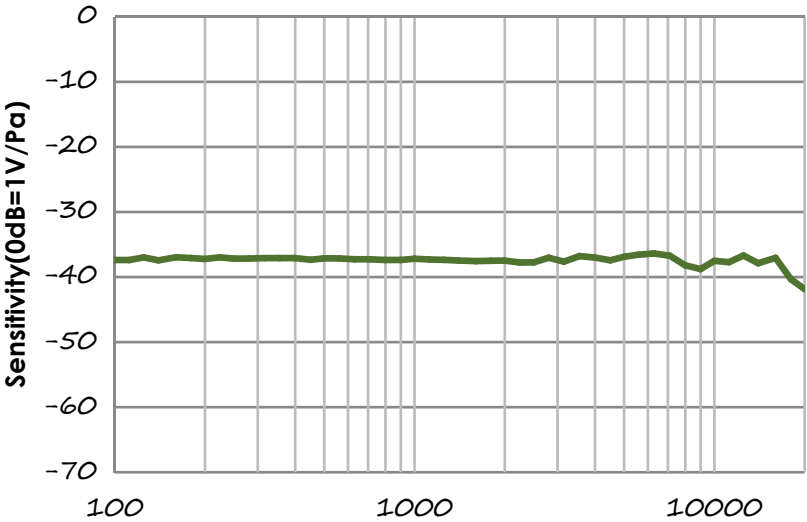



Hz




BY6022FOB-K	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.2mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-10.0VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA





Frequency Response Curve

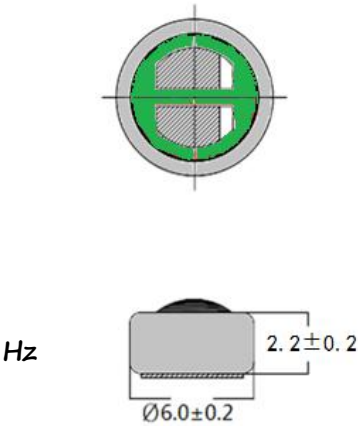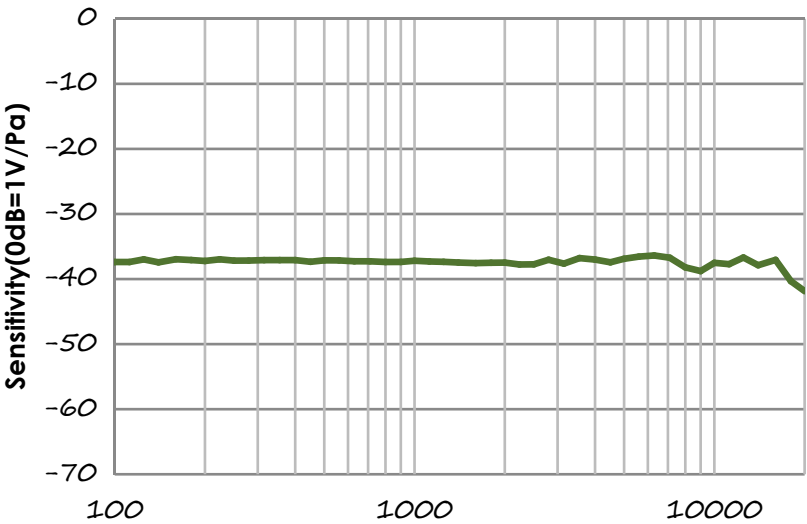


BY6027FOP2.8-CRK	Type	Omni-directional
	Dimensions	Φ6.0mm x 2.7mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

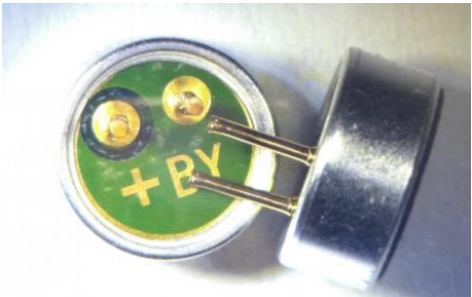



Frequency Response Curve

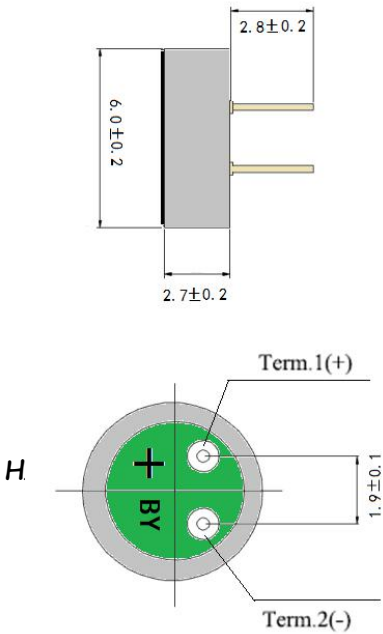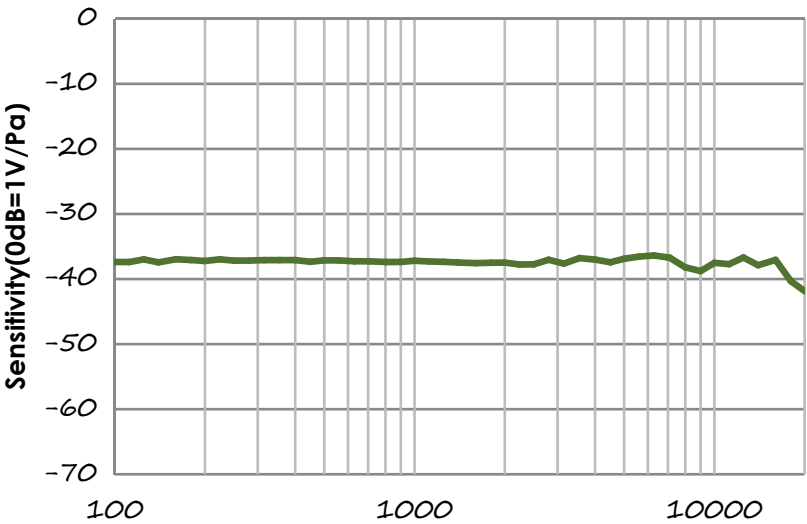


BY6050FOP2.8-CRK	Type	Omni-directional
	Dimensions	Φ6.0mm x 5.0mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-5VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

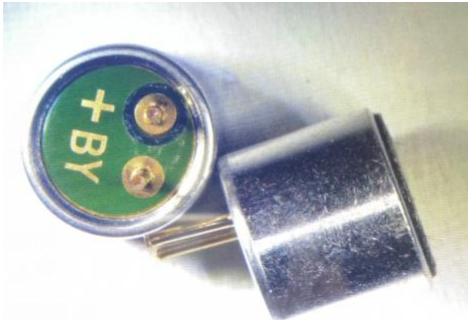



Frequency Response Curve

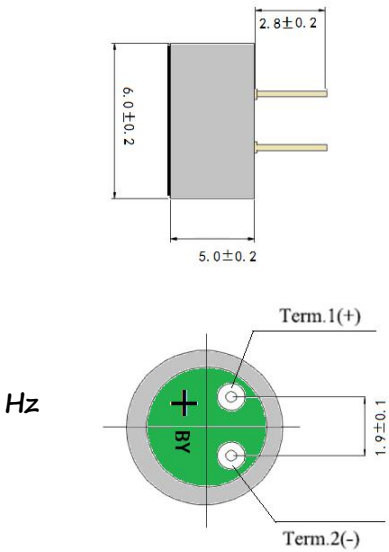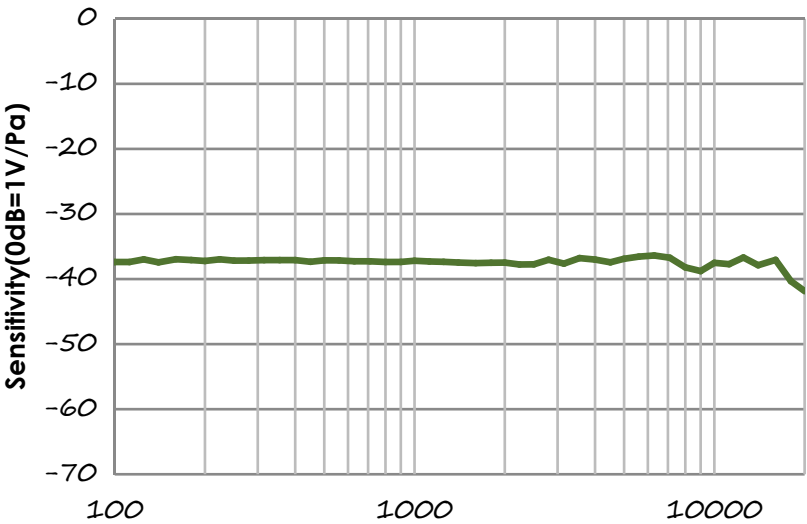




BY9767FOB-CR	Type	Omni-directional
	Dimensions	Φ9.7mm x 6.7mm
	SNR	Typical 60dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.2-10.0VDC
	AOP	110dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

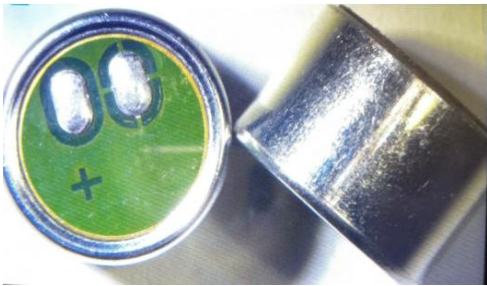




Frequency Response Curve

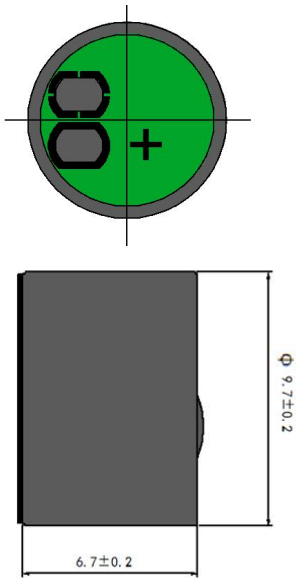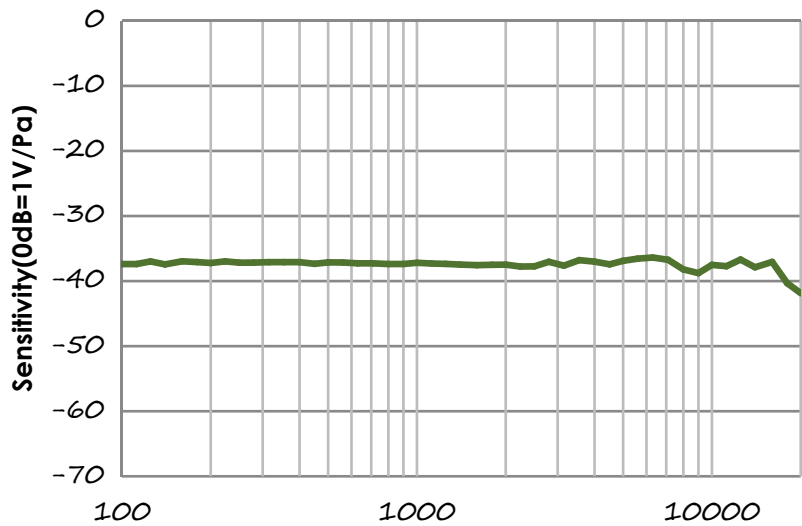



BY9750BUB-C2	Type	Uni-directional
	Dimensions	Φ9.7mm x 5.0mm
	SNR	Typical 65dBA
	THD	<1% (94dBSPL@200Hz-7kHz)
	Sensitivity	-45 ±3dBV/Pa
	Operating voltage	1.2-10.0VDC
	AOP	115dB
	Output impedance	<2.2kΩ
	Current Consumption	<500μA

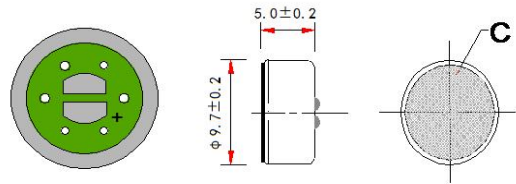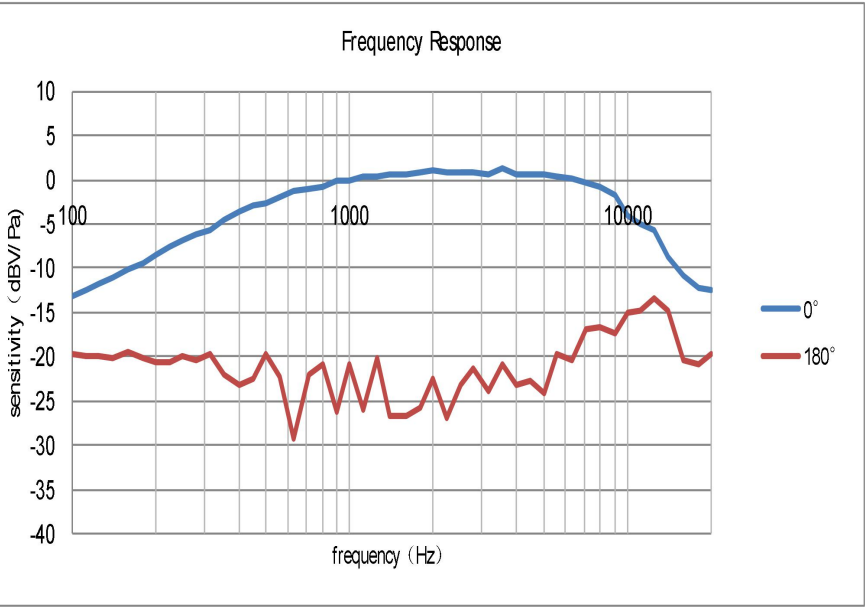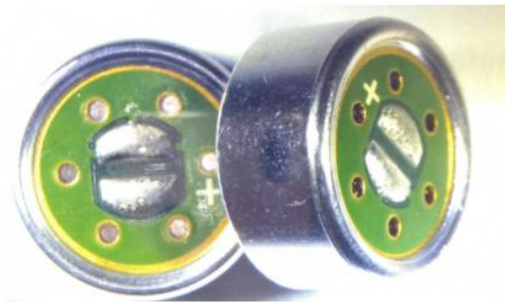




SM0603-10	Type	Omni-directional
	Dimensions	3.76×2.95×1.1 (mm)
	SNR	Typical 59dBA
	THD	<0.5% (94dBSPL@1kHz)
	Sensitivity	-42 ± 3dBV/Pa
	Operating voltage	1.5-3.3 V
	Output impedance	<300 Ω
	Current Consumption	Typical 70μA
	Acoustic Hole	Top

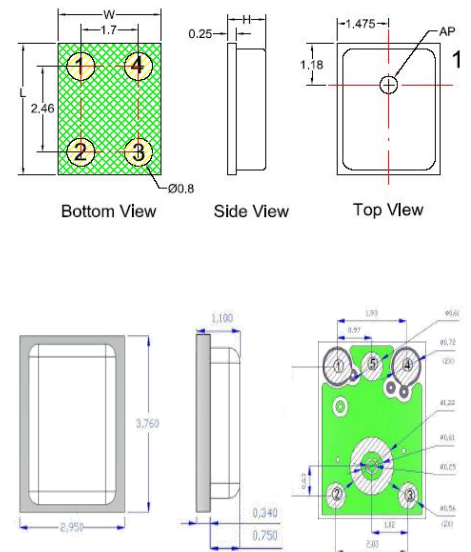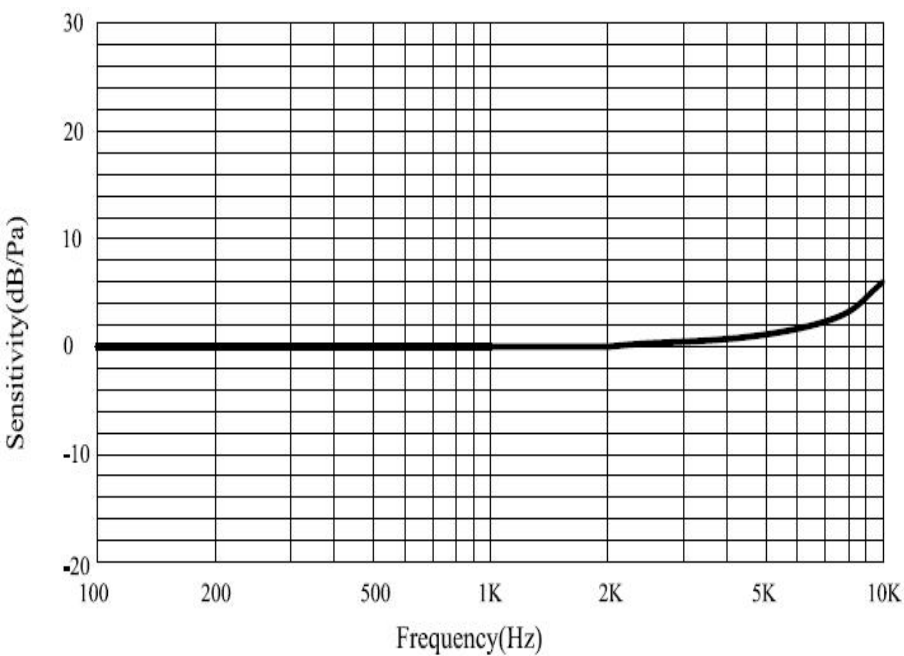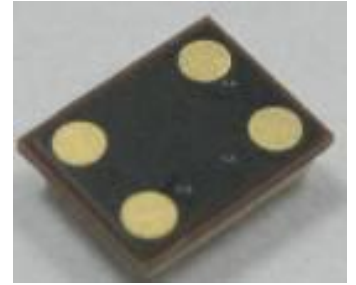




SM0604-01	Type	Omni-directional
	Dimensions	3.76×2.24×1.1 (mm)
	SNR	Typical 59dBA
	THD	<1% (94dBSPL@1kHz)
	Sensitivity	-42 ±3dBV/Pa
	Operating voltage	1.5-3.3 V
	Output impedance	<300 Ω
	Current Consumption	Typical 70μA
	Acoustic Hole	Top

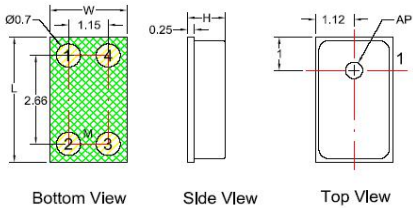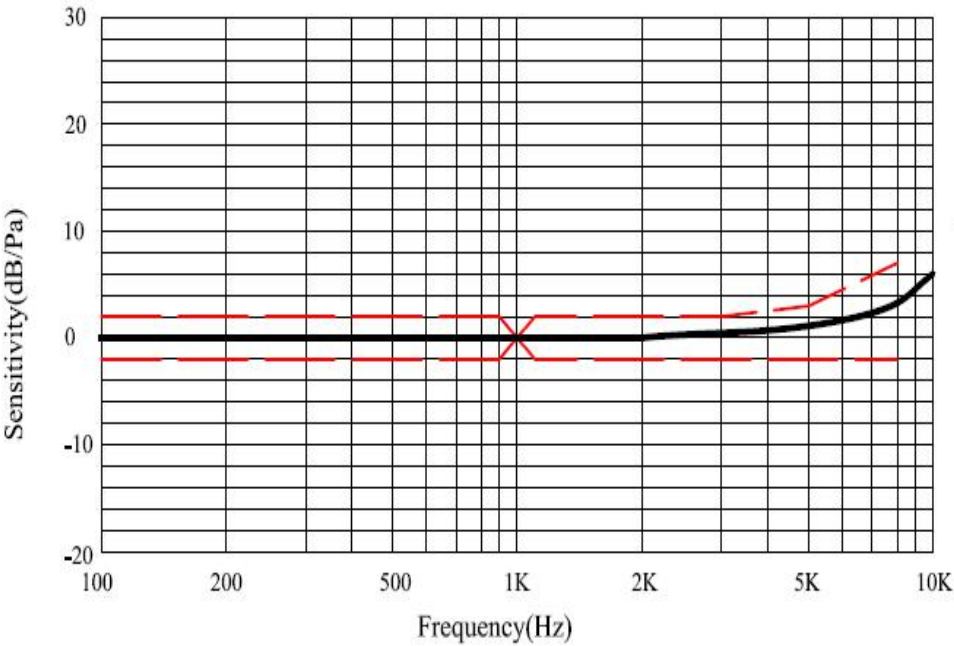

SMZ1005-03	Type	Omni-directional
	Dimensions	3.35×2.5×0.9 mm
	SNR	Typical 64dBA
	THD	<0.5% (94dBSPL@1kHz)
	Sensitivity	-38 ± 1/±3dBV/Pa
	Operating voltage	1.5-3.3 V
	Output impedance	<300 Ω
	Current Consumption	Typical 70μA
	Acoustic Hole	Bottom

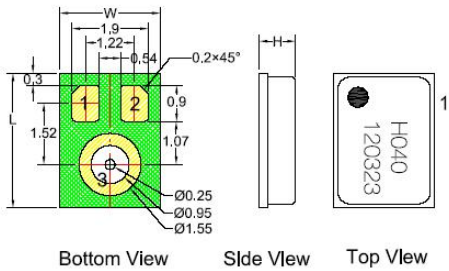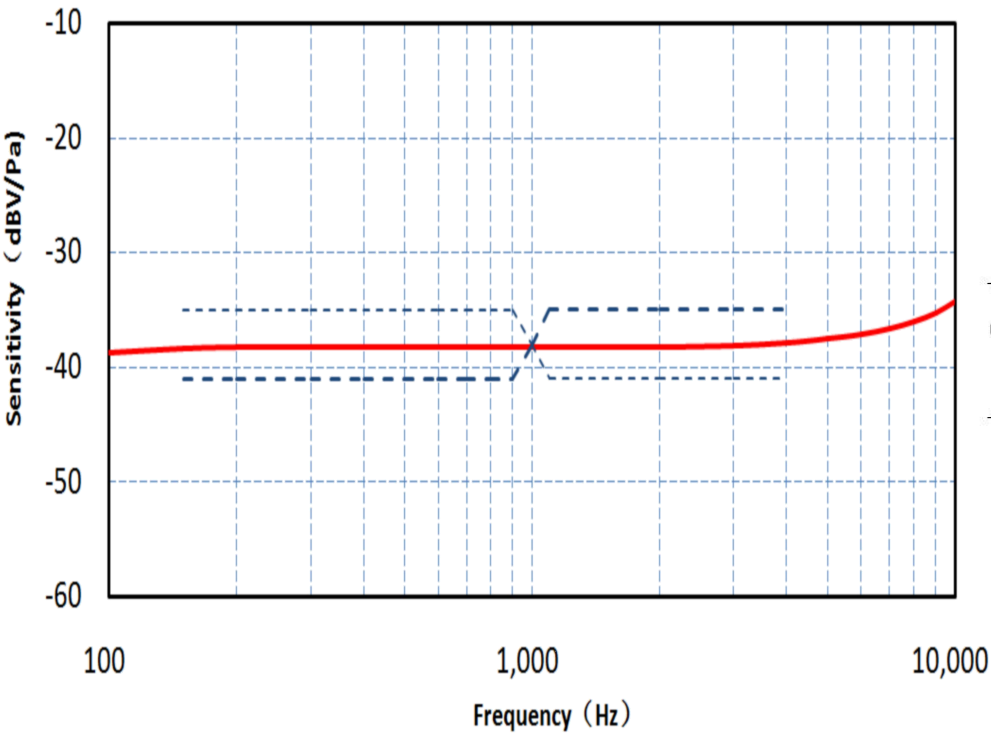


SMD4310-04	Type	Omni-directional
	Dimensions	4×3×1 mm
	SNR	Typical 59dBA
	THD	<1% (94dBSPL@1kHz)
	Sensitivity	-26 ±3dBFS
	Operating voltage	1.5-3.3 V
	Current Consumption	Typical 750μA
	Acoustic Hole	TOP

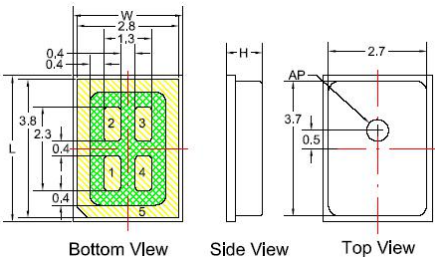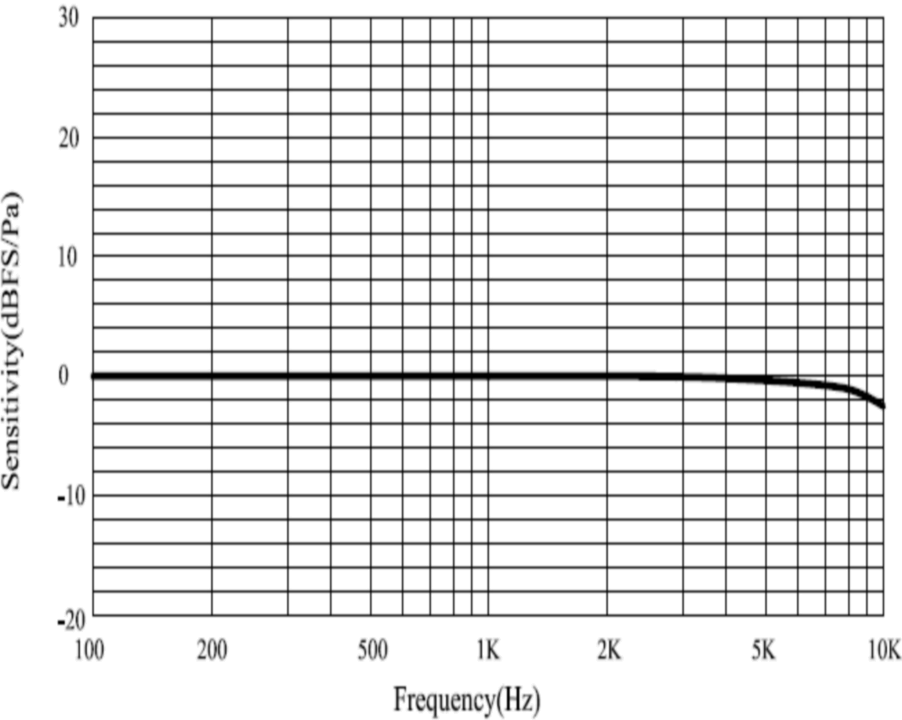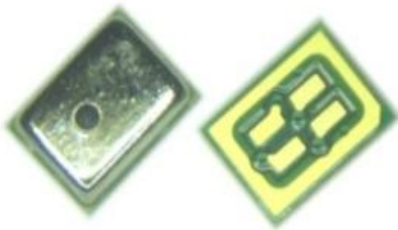

请联系我们

- 周玉海 销售总监
- 手机: 15920000025
- TEL:+86 075533977710
- +86 075533977711
- FAX:+86 075533977712
- QQ:279793286
- E-mail:xsbs88@bydsmic.com
- Web:www.bysmic.com

- ADD:深圳市龙华区福诚街道樟亿路隆添利工业园EA5楼

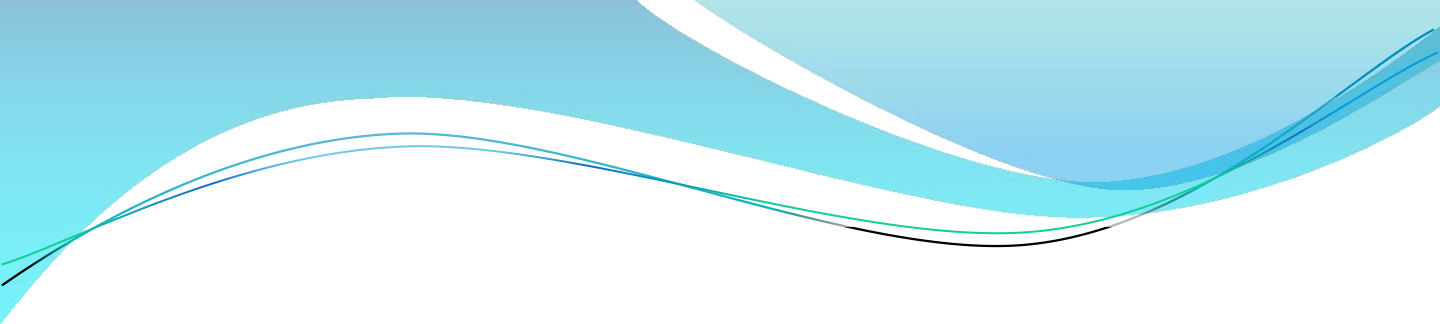

深圳市博音电声科技有限公司

Shenzhen bo sound electroacoustic technology co., LTD

感谢观看！